


## Push Travel Girder Beam Trolley

- Use with hand and electric hoists
- Screw type adjuster enables safe and speedy adjustments
- Meets the WLL performance requirements of BS EN13157
- Side plates produced with trolley wheel guards for additional safety
- The high grade steel sealed ball bearings for smooth and precise rolling



W.L.L	Beam Range	A	B	C	Weight
kgs	(mm)	(mm)	(mm)	(mm)	(kgs)
500	50-220	295	198	158	5
1000	58-220	285	238	183	8.7
2000	66-220	300	277	208	13.9
3000	74-220	321	324	249	23.5
5000	90-220	354	373	296.5	40

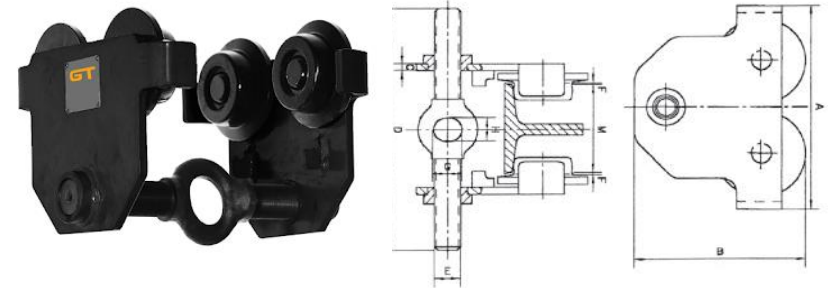

SWL Rope Lifting & Testing, 65-69 Bernard Street, Southampton Hampshire, SO14 3BA

Telephone: 02380 338286

Email: [sales@swl.org.uk](mailto:sales@swl.org.uk)