



## Lever Hoist

- High grade steel body protects gears and brake system.
- Easy to use free wheel mechanism that enables chain to be pulled freely when not under load.
- The load chain is hardened grade 80 alloy steel and electro galvanised in finished.
- Short arm lever and special gear ratio allows an easy lift with minimum stress and maximum security.

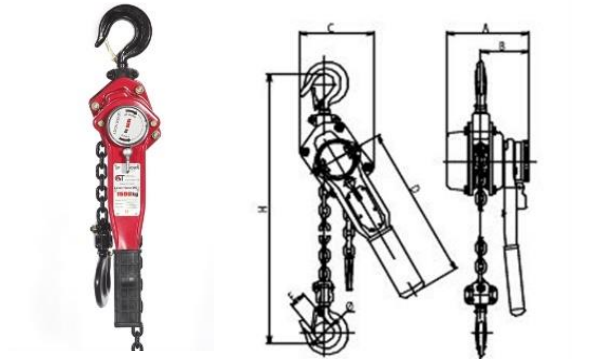

W.L.L	a	b	c	e	Ã~	d	h	Load Chain Dia.	No of Falls	Effort Req to Lift Max Load	Weight
kgs	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(N)	(Kgs)
750	149	89	128	26	37	278	310	6	1	150	6.2
1500	171	102	145	36	45	378	385	7	1	310	9.5
3000	204	114	203	44	55	418	460	10	1	380	20.2
6000	204	114	243	50	65	418	600	10	2	390	32
9000	204	114	338	53	67	418	770	10	3	390	51

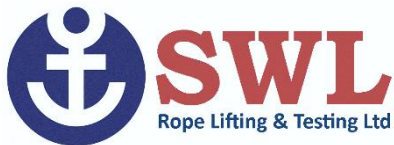

SWL Rope Lifting & Testing, 65-69 Bernard Street, Southampton Hampshire, SO14 3BA  
**Telephone:** 02380 338286  
**Email:** [sales@swl.org.uk](mailto:sales@swl.org.uk)