



## Ratchet Type Loadbinder- EN12195 Part 3

- Drop forged/cast steel, quenched and tempered.
- Painted finish.
- Fitted with hooks and special securing device.
- Marked with size, lashing capacity and manufacturers mark.
- Meets the performance requirements of EN 12195 Part 3.

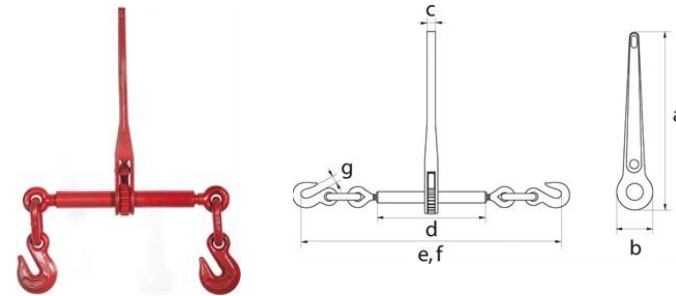

| Lashing Capacity (kN) | Minimum Breaking Load (kN) | Chain Dia (mm) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) | Take Up (mm) | Weight (kgs) |
|-----------------------|----------------------------|----------------|--------|--------|--------|--------|--------|--------|--------|--------------|--------------|
| 40                    | 80.4                       | 8              | 355    | 66     | 16     | 252    | 742    | 573    | 11     | 169          | 4.5          |
| 63                    | 126                        | 10             | 355    | 66     | 16     | 252    | 789    | 620    | 13     | 169          | 5.4          |
| 100                   | 212                        | 13             | 355    | 66     | 16     | 252    | 866    | 703    | 17     | 163          | 7.7          |
| 160                   | 322                        | 16             | 355    | 66     | 16     | 252    | 892    | 733    | 20     | 159          | 10.2         |

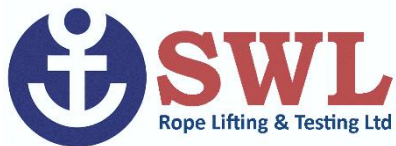

SWL Rope Lifting & Testing, 65-69 Bernard Street, Southampton Hampshire, SO14 3BA

Telephone: 02380 338286

Email: [sales@swl.org.uk](mailto:sales@swl.org.uk)