



## Large Screw Pin Dee Shackle

- Meets the W.L.L performance requirements of the withdrawn standard BS 3032.
- High tensile steel C1045.
- Self-colour and hot dip galvanised finish available.
- Supplied with an EC declaration of conformity.
- Factor of safety 4:1.
- Marked with manufacturers mark, ID mark, W.L.L & CE.

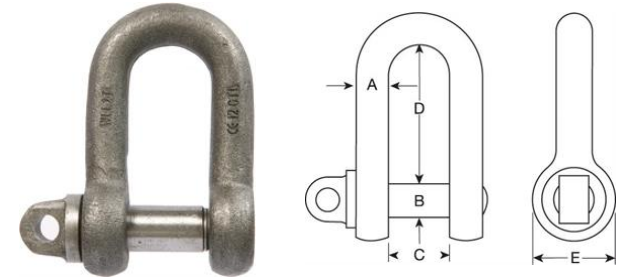

W.L.L	a	b	c	d	e	Weight
tonnes	(inches)	(inches)	(inches)	(inches)	(inches)	kgs
0.25	1/4	3/8	1/2	1	1/4	0.10
0.50	3/8	1/2	3/4	1 1/2	1	0.12
0.75	1/2	5/8	1 1/8	2 1/8	1 1/4	0.29
1.50	5/8	3/4	1 1/4	2 1/2	1 1/2	0.57
2.00	3/4	7/8	1 1/2	2 7/8	1 3/4	0.92
3.00	7/8	1	1 3/4	3 1/4	2	1.59
3.75	1	1 1/8	2	3 3/4	2 1/4	2.12
5.00	1 1/8	1 1/4	2 1/8	4 1/8	2 1/2	3.18
6.00	1 1/4	1 3/8	2 3/8	4 1/2	2 3/4	4.54
7.00	1 3/8	1 1/2	2 5/8	5	3	6.06
9.50	1 1/2	1 3/4	2 3/4	5 3/8	3 1/2	8.74
11.25	1 5/8	1 7/8	3	5 3/4	-	9.99
13	1 3/4	2	3 1/4	6 1/8	-	12.49
14.25	1 7/8	2 1/8	3 5/8	7	-	15.21

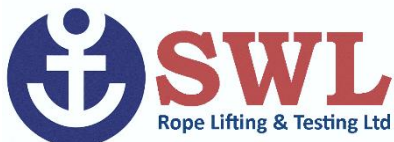

SWL Rope Lifting & Testing, 65-69 Bernard Street, Southampton Hampshire, SO14 3BA

Telephone: 02380 338286

Email: [sales@swl.org.uk](mailto:sales@swl.org.uk)