



# Safety Pin Standard Bow Shackle

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Meets the W.L.L. requirements of EN 13889 from sizes 0.5 tonne to 25 tonne.
- Meets the W.L.L. requirements of US Fed Spec RR C 271.
- Supplied with an EC declaration of conformity.
- Safety factor 6:1.
- Hot dipped galvanised.
- Marked with manufacturers mark, size, ID mark, CE and W.L.L.

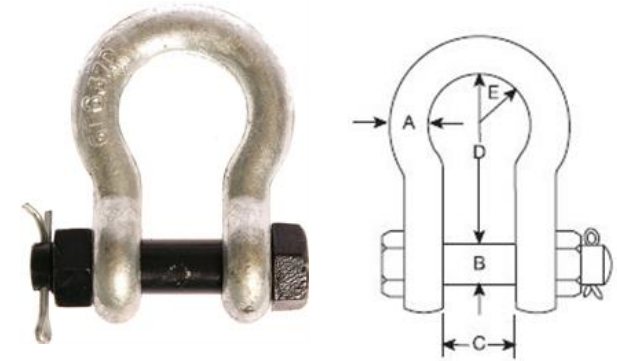

| W.L.L<br>(tonnes) | A<br>(mm) | B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) | Weight<br>(kgs/100) |
|-------------------|-----------|-----------|-----------|-----------|-----------|---------------------|
| 0.50              | 6.4       | 8.0       | 12.0      | 28.6      | 20        | 0.07                |
| 0.75              | 8.0       | 10.0      | 13.0      | 31.0      | 21        | 0.13                |
| 1.00              | 9.5       | 12.0      | 17.0      | 36.5      | 26        | 0.17                |
| 1.50              | 11.0      | 12.0      | 18.0      | 42.5      | 29        | 0.25                |
| 2.00              | 12.7      | 16.0      | 20.6      | 47.3      | 32        | 0.44                |
| 3.25              | 16.0      | 19.8      | 27.0      | 60.5      | 43        | 0.79                |
| 4.75              | 19.0      | 22.0      | 32.0      | 71.5      | 51        | 1.26                |
| 6.50              | 22.0      | 27.0      | 36.6      | 84.0      | 58        | 1.88                |
| 8.50              | 25.0      | 30.0      | 43.0      | 96.0      | 68        | 2.78                |
| 9.50              | 28.5      | 33.0      | 46.0      | 108.0     | 75        | 3.87                |
| 12.00             | 31.8      | 36.0      | 51.6      | 119.0     | 83        | 5.26                |
| 13.50             | 34.9      | 39.0      | 57.0      | 133.5     | 92        | 6.94                |
| 17.00             | 38.0      | 42.0      | 60.0      | 147.0     | 99        | 8.79                |
| 25.00             | 44.0      | 52.0      | 73.0      | 178.0     | 126       | 14.99               |
| 35.00             | 50.0      | 56.0      | 82.0      | 197.0     | 138       | 20.65               |
| 55.00             | 63.5      | 68.0      | 105.0     | 267.0     | 180       | 41.05               |
| 85.00             | 75.0      | 85.0      | 127.0     | 320.0     | 190       | 62.00               |
| 120.00            | 88.0      | 95.0      | 133.0     | 372.0     | 240       | 106.00              |

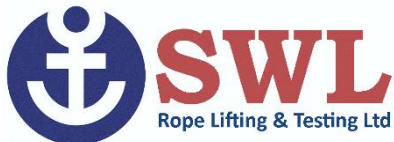

SWL Rope Lifting & Testing, 65-69 Bernard Street, Southampton Hampshire, SO14 3BA

Telephone: 02380 338286

Email: [sales@swl.org.uk](mailto:sales@swl.org.uk)