



## Safety Pin Standard Dee Shackle

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Meets the W.L.L. requirements of EN 13889 from sizes 1 tonne to 25 tonne.
- Meets the W.L.L. requirements of US Fed Spec RR C 271.
- Supplied with an EC declaration of conformity.
- Safety factor 6:1.
- Hot dipped galvanised.
- Marked with manufacturers mark, size, ID mark, CE and W.L.L.

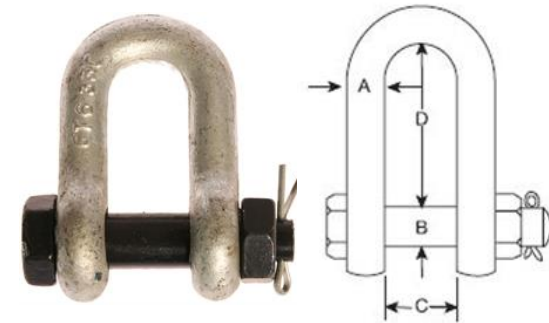

| W.L.L    | A    | B    | C     | D     | Weight    |
|----------|------|------|-------|-------|-----------|
| (tonnes) | (mm) | (mm) | (mm)  | (mm)  | (kgs/100) |
| 1.00     | 9.5  | 12.0 | 17.0  | 31.6  | 0.17      |
| 1.50     | 11.0 | 12.0 | 18.0  | 36.5  | 0.25      |
| 2.00     | 12.7 | 16.0 | 20.6  | 41.3  | 0.44      |
| 3.25     | 16.0 | 19.8 | 27.0  | 51.0  | 0.79      |
| 4.75     | 19.0 | 22.0 | 32.0  | 62.0  | 1.26      |
| 6.50     | 22.0 | 27.0 | 36.6  | 74.8  | 1.88      |
| 8.50     | 25.0 | 30.0 | 43.0  | 81.0  | 2.78      |
| 9.50     | 28.5 | 33.0 | 46.0  | 89.5  | 3.87      |
| 12.00    | 31.8 | 36.0 | 51.6  | 100.8 | 5.26      |
| 13.50    | 34.9 | 39.0 | 57.0  | 112.5 | 6.94      |
| 17.00    | 38.0 | 42.0 | 60.0  | 125.0 | 8.79      |
| 25.00    | 44.0 | 52.0 | 73.0  | 140.5 | 14.99     |
| 35.00    | 50.0 | 56.0 | 82.0  | 171.5 | 20.65     |
| 55.00    | 63.5 | 68.0 | 105.0 | 203.0 | 41.05     |
| 85.00    | 75.0 | 85.0 | 127.0 | 230.0 | 62.00     |
| 120.00   | 88.0 | 95.0 | 133.0 | 262.0 | 106.00    |

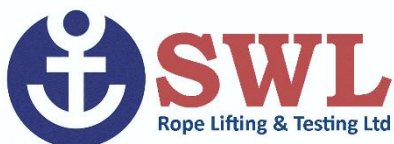

SWL Rope Lifting & Testing, 65-69 Bernard Street, Southampton Hampshire, SO14 3BA

Telephone: 02380 338286

Email: [sales@swl.org.uk](mailto:sales@swl.org.uk)