



## Screw Pin Standard Dee Shackle

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Meets the W.L.L. requirements of EN 13889 from sizes 1 tonne to 25 tonne.
- Meets the W.L.L. requirements of US Fed Spec RR C 271.
- Supplied with an EC declaration of conformity.
- Safety factor 6:1.
- Hot dipped galvanised.
- Marked with manufacturers mark, size, ID mark, CE and W.L.L.

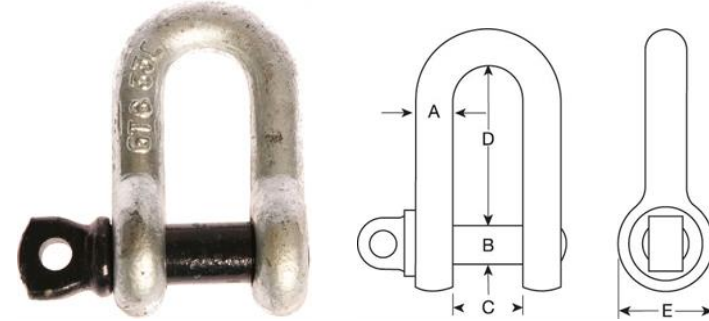

W.L.L	A	B	C	D	E	Weight
(tonnes)	(mm)	(mm)	(mm)	(mm)	(mm)	(kgs/100)
0.33	5	6	9.5	-	16	0.02
0.5	6.4	8	12	22	20	0.06
0.75	8	10	13	26	21	0.11
1	9.5	11	17	32	26	0.15
1.5	11	12	18	36.5	29	0.21
2	12.7	16	20.6	41.3	32	0.37
3.25	16	19.8	27	51	43	0.65
4.75	19	22	32	62	51	1.04
6.5	21.7	27	36.6	74.8	58	1.56
8.5	25.4	30	43	81	68	2.32
9.5	28.5	33	46	90	75	3.28
12	31.5	36	51.6	100.8	83	4.51
13.5	34.9	39	57	112.5	92	5.93
17	38	42	60	125	99	7.89
25	44	52	73	146.5	126	13.4
35	50	56	82	171	138	18.85
55	63.5	68	105	203	180	37.86

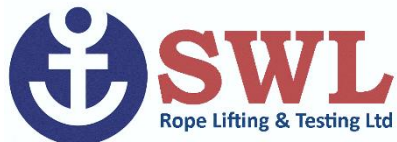

SWL Rope Lifting & Testing, 65-69 Bernard Street, Southampton Hampshire, SO14 3BA

Telephone: 02380 338286

Email: [sales@swl.org.uk](mailto:sales@swl.org.uk)