



Adjustable Beam Clamp

- Easy, simple mounting
- The clamp is adjustable so it fits a wide range of flanges widths and beams
- Meets the WLL performance requirements of BS EN13155
- Specialised jaw applied the load way from the edge, reducing the stress
- Supplied with an EC Declaration of Conformity and User Guide.

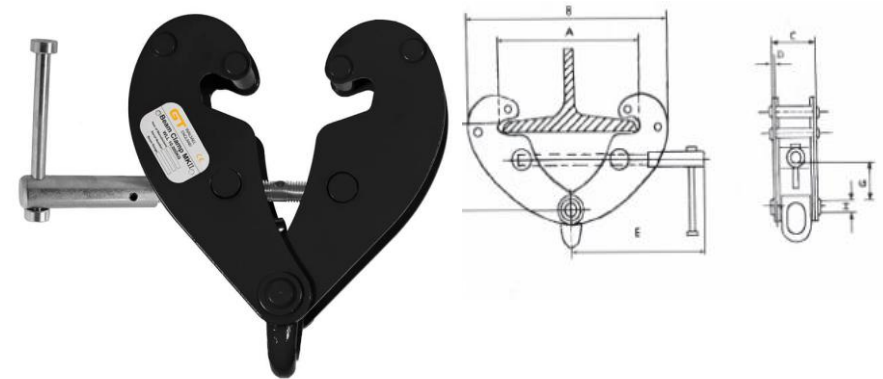

W.L.L	Beam Range	A (max)	B (min)	B (max)	C	D	E	F (min)	F (max)	G (min)	Weight
kgs	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kgs)
1000	75-220	295	185	400	80	4	225	90	165	25	3.8
2000	75-220	295	185	400	85	6	225	90	165	25	5
3000	80-320	365	240	520	117	8	258	135	225	45	9
5000	80-320	365	240	520	125	10	258	135	225	45	11
10000	90-230	365	255	520	158	12	280	160	230	50	16

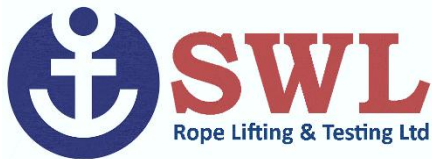

SWL Rope Lifting & Testing, 4 Monza House, Third Avenue, Millbrook, Southampton, SO15 0LD

Telephone: 02380 338286

Email: sales@swl.org.uk