


Geared Travel Girder Beam Trolley

- Use with hand and electric hoists
- Screw type adjuster enables safe and speedy adjustments
- Meets the WLL performance requirements of BS EN13157
- Side plates produced with trolley wheel guards for additional safety
- The high grade steel sealed ball bearings for smooth and precise rolling



W.L.L	Beam Range	A	B	C	Weight
kgs	(mm)	(mm)	(mm)	(mm)	(kgs)
500	50-220	352.5	198	158	9
1000	58-220	353.5	238	183	12.6
2000	66-220	362	277	208	18.5
3000	74-220	406.5	324	249	28
5000	90-220	343.5	373	296.5	45

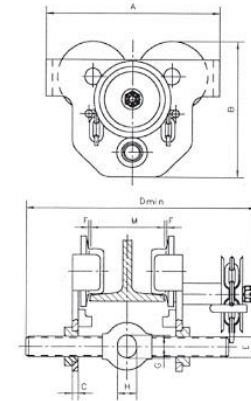

SWL Rope Lifting & Testing, 4 Monza House, Third Avenue, Millbrook, Southampton, SO15 0LD

Telephone: 02380 338286

Email: sales@swl.org.uk