



Safety Pin Standard Dee Shackle

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Meets the W.L.L. requirements of EN 13889 from sizes 1 tonne to 25 tonne.
- Meets the W.L.L. requirements of US Fed Spec RR C 271.
- Supplied with an EC declaration of conformity.
- Safety factor 6:1.
- Hot dipped galvanised.
- Marked with manufacturers mark, size, ID mark, CE and W.L.L.

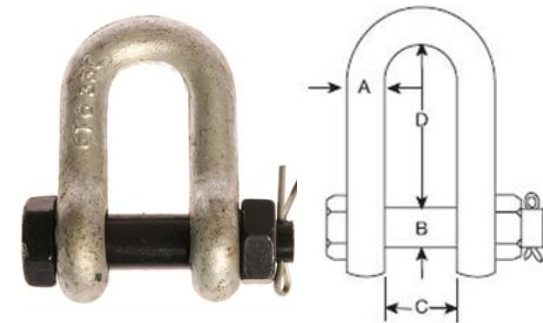

W.L.L	A	B	C	D	Weight
(tonnes)	(mm)	(mm)	(mm)	(mm)	(kgs/100)
1.00	9.5	12.0	17.0	31.6	0.17
1.50	11.0	12.0	18.0	36.5	0.25
2.00	12.7	16.0	20.6	41.3	0.44
3.25	16.0	19.8	27.0	51.0	0.79
4.75	19.0	22.0	32.0	62.0	1.26
6.50	22.0	27.0	36.6	74.8	1.88
8.50	25.0	30.0	43.0	81.0	2.78
9.50	28.5	33.0	46.0	89.5	3.87
12.00	31.8	36.0	51.6	100.8	5.26
13.50	34.9	39.0	57.0	112.5	6.94
17.00	38.0	42.0	60.0	125.0	8.79
25.00	44.0	52.0	73.0	140.5	14.99
35.00	50.0	56.0	82.0	171.5	20.65
55.00	63.5	68.0	105.0	203.0	41.05
85.00	75.0	85.0	127.0	230.0	62.00
120.00	88.0	95.0	133.0	262.0	106.00

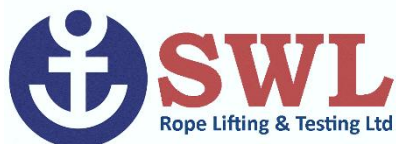

SWL Rope Lifting & Testing, 4 Monza House, Third Avenue, Millbrook, Southampton, SO15 0LD

Telephone: 02380 338286

Email: sales@swl.org.uk