



Small BS Screw Pin Bow Shackle

- Meets the W.L.L performance requirements of the withdrawn standard BS 3032.
- High tensile steel C1045.
- Self-colour and hot dip galvanised finish available.
- Supplied with an EC declaration of conformity.
- Factor or safety 4:1.
- Marked with manufacturers mark, ID mark, W.L.L & CE.

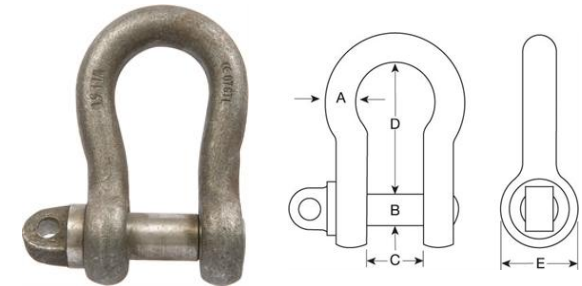

W.L.L	a	b	c	d	e	Weight
tonnes	(inches)	(inches)	(inches)	(inches)	(inches)	kgs
0.50	3/8	1/2	5/8	1 1/2	1	0.18
1.00	1/2	5/8	7/8	2	1 1/4	0.34
1.50	5/8	3/4	1 1/8	2 1/2	1 1/2	0.62
2.00	3/4	7/8	1 3/8	3	1 3/4	1.05
3.00	7/8	1	1 1/2	3 1/2	2	1.63
4.00	1	1 1/8	1 3/4	4	2 1/4	2.28
5.00	1 1/8	1 1/4	2	4 1/2	2 1/2	3.20
6.25	1 1/4	1 3/8	2 1/4	5	2 3/4	4.54
7.50	1 3/8	1 1/2	2 3/8	5 1/2	3	5.74
9.25	1 1/2	1 3/4	2 5/8	6	3 1/2	8.51
10.50	1 5/8	1 7/8	2 7/8	6 1/2	3 3/4	11.23

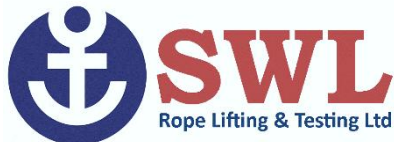

SWL Rope Lifting & Testing, 4 Monza House, Third Avenue, Millbrook, Southampton, SO15 0LD

Telephone: 02380 338286

Email: sales@swl.org.uk