


Small BS Screw Pin Dee Shackle

- Meets the W.L.L performance requirements of the withdrawn standard BS 3032.
- High tensile steel C1045.
- Self-colour and hot dip galvanised finish available.
- Supplied with an EC declaration of conformity.
- Factor of safety 4:1.
- Marked with manufacturers mark, ID mark, W.L.L & CE.



W.L.L	a	b	c	d	e	Weight
tonnes	(inches)	(inches)	(inches)	(inches)	(inches)	kgs
0.30	1/4	3/8	3/8	7/8	3/4	0.06
0.60	3/8	1/2	5/8	1 3/8	1	0.15
1.00	1/2	5/8	7/8	1 7/8	1 1/4	0.33
1.75	5/8	3/4	1	2 1/4	1 1/2	0.61
2.50	3/4	7/8	1 1/4	2 3/4	1 3/4	0.93
3.50	7/8	1	1 3/8	3 1/4	2	1.80
4.50	1	1 1/8	1 1/2	3 5/8	2 1/4	2.15
5.50	1 1/8	1 1/4	1 3/4	4 1/8	2 1/2	3.02
7.00	1 1/4	1 3/8	1 7/8	4 1/2	2 3/4	4.20
8.00	1 3/8	1 1/2	2 1/8	5	3	5.34
10.75	1 1/2	1 3/4	2 3/8	5 1/2	3 1/2	8.36
13.00	1 5/8	1 7/8	2 1/2	5 7/8	-	9.53

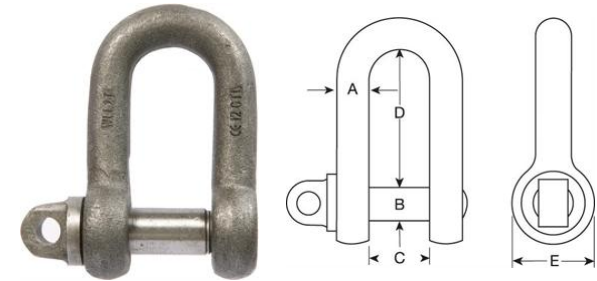

SWL Rope Lifting & Testing, 4 Monza House, Third Avenue, Millbrook, Southampton, SO15 0LD

Telephone: 02380 338286

Email: sales@swl.org.uk